



# SMT-1939L Tubular Solenoids

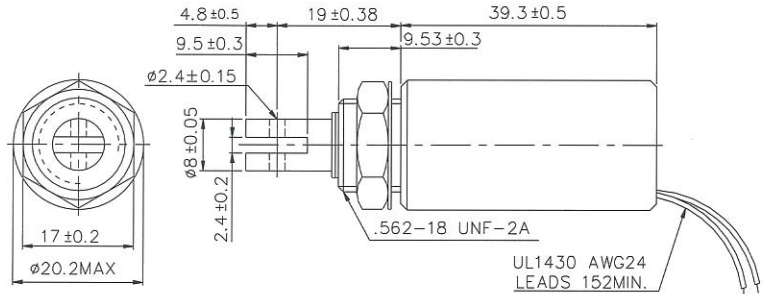


Plunger Weight 可動鐵心重量 : 20g  
Total Weight 總重量 : 82g

Shown Energized 通電狀態 UNIT 單位 : mm


## STROKE Vs FORCE 行程 / 吸引力

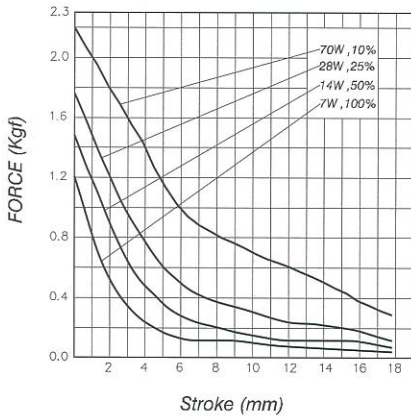

## STROKE Vs RESPONSE TIME 行程 / 反應時間

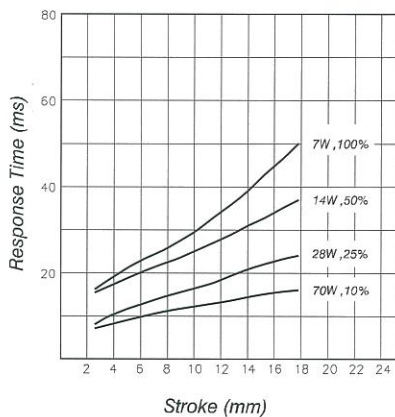

## AMPERE-TURNS Vs FORCE 安-匝 / 吸引力

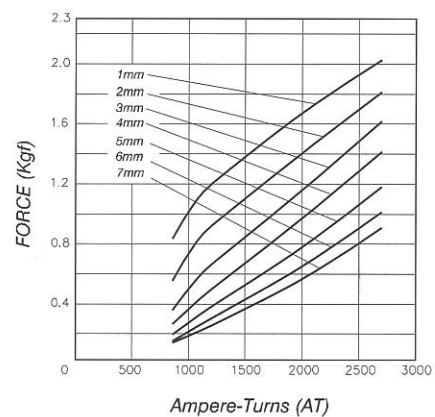

## COIL DATA 線圈資料

Heat Sink: 80 × 80 × 3mm (aluminum)  
散熱片 : 80 × 80 × 3mm (鋁)

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$			Continuous (100%)	Or less (50%)	Or less (25%)	Or less (10%)
作動週期 (%) = $\frac{\text{ON 時間}}{\text{ON 時間} + \text{OFF 時間}} \times 100\%$			連續 (100%)	間斷 (50%)	間斷 (25%)	間斷 (10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)			∞	230	25	6
Watts at 20°C 瓦特數 (W) (在 20°C)			7	14	28	70
Ampere-turns at 20°C AT 值 (在 20°C)			855	1200	1700	2700
Type no.	Resistance (20°C) Ω ± 10%	No. turns	Volts DC			
型號	阻值(Ω) ± 10%	繞線圈數	電壓			
SMT-1939L06AA	5.14	733	6	8.5	12	19
SMT-1939L12AA	20.6	1470	12	17	24	38
SMT-1939L24AA	82.3	2930	24	34	48	76
SMT-1939L48AA	329	5800	48	68	96	152